


DIRECT/INDIRECT

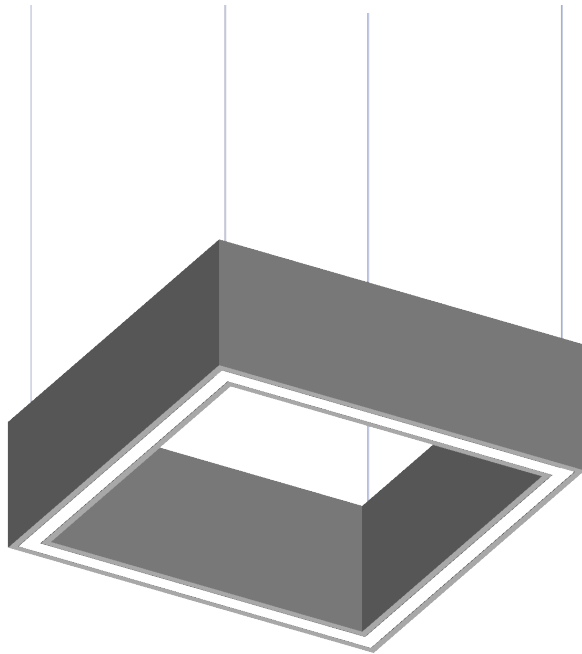

OVERVIEW


AIREBAFFLE™ FRAME (DIRECT/ INDIRECT)

The AireBaffle™ Frame (Direct/Indirect) provides a decorative, acoustic, down or up/down lighting fixture using Airelight™ Linear luminaires. Absorbing sound & emitting light, the AireBaffle™ Frame is the perfect combination of design and functionality. These suspended acoustic baffles come in a variety of configurations and finishes.

FEATURES

- Sound absorbing, light emitting, geometric shaped baffle
- Integrated Airelight™ LED ceramic lighting
- Noise Reduction Coefficient (NRC) of 1.0
- Configurations: Geometric shapes (2' - 6' sides)
- Eco-friendly acoustic material available in a variety of colors
- Use as a stand-alone pendant or grouping, or pair with other AireBaffle™ acoustic options

DIMENSIONS

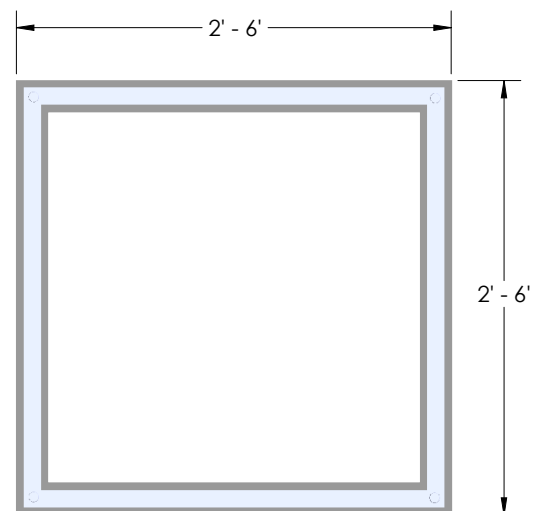

AIREBAFFLE™ FRAME (AIRELIGHT™ ACOUSTIC SERIES)



AIREBAFFLE™ FRAME (AIRELIGHT™ ACOUSTIC SERIES)

DIRECT/INDIRECT

LIGHT SPECIFICATIONS

PERFORMANCE

Light Fixture	Airelight™ Linear ES 1.0		
Directional Lighting	Direct / Indirect		<u>Linear ES 1.0 (DIRECT)</u> <u>Linear ES 0.5 (INDIRECT)</u>
Beam Angle	Lambertian (DIRECT) / Batwing (INDIRECT)	Lumens Per Foot	755 @ 3500K 456 @ 3500K
Lens Aperture	1" Wide (DIRECT) / 0.5" (INDIRECT)	Efficacy (lms/W)	125 @ 3500K 115 @ 3500K
Controls	0-10VDC / Wireless	Power Consumption	6W / linear foot 4W/ linear foot
Rating	Suitable for Dry Locations	CRI	80+ 80+

MATERIAL SPECIFICATIONS

Product Name	AireBaffle™ Frame (Direct)
Material	100% PET (~60% recycled content)
Mounting Hardware	Griplock® Powered Suspension System / Aircraft Cable
Warranty	5 year limited warranty
Size Range	Length(2' - 6') x Width(2' - 6') x Height(8, 12, 16") <small>*Custom sizes available upon request*</small>
Environmental	Low-VOC material, meeting requirements for LEED and other green building certifications
Fire Rating	ASTME E-84 Class C (available with Class A treatment)
Acoustics	Calculated Acoustical Performance: NRC 1.0

COLOR OPTIONS



877.298.0092



goldeneyelighting.com

V1.2


AIREBAFFLE™ FRAME (AIRELIGHT™ ACOUSTIC SERIES)



AIREBAFFLE™ FRAME (AIRELIGHT™ ACOUSTIC SERIES)

DIRECT/INDIRECT

ORDERING



- (1) BAFFLE TYPE
 - FD - FRAME (Direct)
 - FI - FRAME (Indirect)
 - FDI - FRAME (Both)
- (2) LIGHT FIXTURE
 - 1 - 1.0 ES (1.0" Width)
- (3) LENGTH
 - 2 - 2'
 - 4 - 4'
 - 6 - 6'
- (4) WIDTH
 - 2 - 2'
 - 4 - 4'
 - 6 - 6'
- (5) HEIGHT
 - 8 - 8"
 - 12 - 12"
 - 16 - 16"
- (6) COLOR TEMP
 - 27 or 27-90 - 2700K 80CRI or 90CRI
 - 30 or 30-90 - 3000K 80CRI or 90CRI
 - 35 - 3500K 80CRI
 - 40 - 4000K 80CRI

- (7) SUSPENSION SYSTEM
 - PS - POWER SUSPENSION
 - AC - AIRCRAFT CABLE

- (8) SUSPENSION LENGTH

<u>PS</u>	<u>AC</u>
48 - 48"	24-24"
120 - 120"	48 - 48"
180 - 180"	96 - 96"
240 - 240"	120- 120"
	150 - 150"
	180 - 180"

(9) BAFFLE COLOR

- | | | | |
|--|---|---|--|
| 116 - MARBLE HEATHER
121 - ZINC
125 - GRANITE HEATHER
137 - CRETE HEATHER
143 - SLATE HEATHER
146 - MED GREY HEATHER
152 - ARCHAIC | 175 - CHARCOAL HEATHER
190 - PURE BLACK
221 - FLAX
231 - CAMEL
281 - JAVA
321 - SKY
370 - DEEP BLUE | 380 - ABYSS
431 - LIME
455 - MOSS
476 - EMERALD
621 - SUNFLOWER
631 - TANGERINE
651 - RED | 655 - BRICK
W810 - NATURAL EUCALYPTUS
W820 - GREYBARK
W830 - MED EUCALYPTUS
W880 - DARK MERBAU |
|--|---|---|--|